


RXFB 薄型铝外壳线绕电阻器 50W-200W

RXFB thin Aluminum Housing Wire Wound Resistors 50W-200W

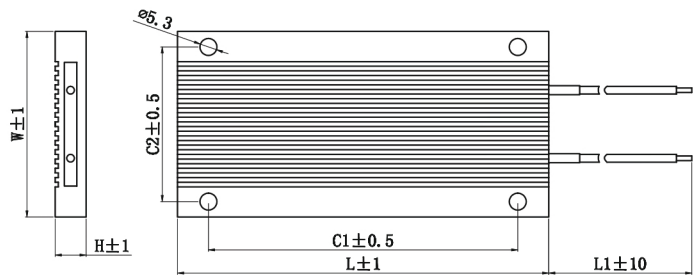

产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 高过载能力
High over loading ability
- 符合欧盟 ROHS 标准
ROHS compliant
- 外形美观、易于安装
Attractive appearance and easy installation

应用范围 Applications

- 电力分配, 负荷测试
Electric power distribution, load test
- 适用于功率电源 / 变频电源等领域
Ideal for functional power supply / Inverter power supply etc
- 用于工控的伺服系统中软启动和制动部分
Applied to the soft starting and braking parts of industrial controlled servo drive system
- 应用领域: 动力电池 Pack、新能源汽车行业
Applied to power battery pack and new energy automotive industry

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)					
				L	W	H	C1	C2	L1
RXFB	50	1R ~ 100R	± 5% (J) ± 10% (K)	70	60	10	50	50	可定制
	100	1R ~ 100R		120			100		
	150	1R ~ 100R		170			150		
	200	1R ~ 100R		150	80		130	70	

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RXFB	100W	50R	± 5%