
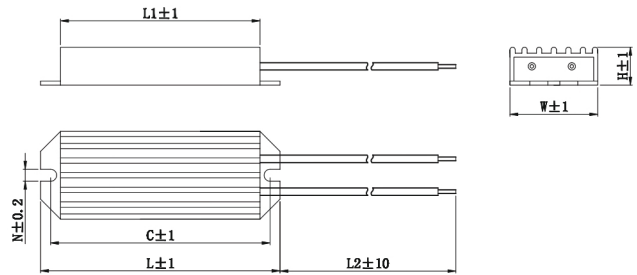


## RXLB-A 薄型铝外壳线绕电阻器 10W-50W

RXLB-A thin Aluminum Housing Wire Wound Resistors 10W-50W

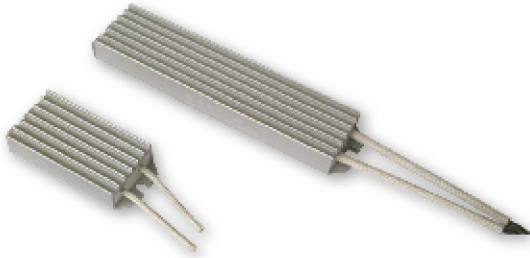

### 产品特点 Features

- 高温负荷特性优良  
Excellent high temperature load performance
- 高过载能力  
High over loading ability
- 符合欧盟 ROHS 标准  
ROHS compliant
- 外形美观、易于安装  
Attractive appearance and easy installation

### 应用范围 Applications

- 电力分配, 负荷测试  
Electric power distribution, load test
- 适用于功率电源 / 变频电源等领域  
Ideal for functional power supply / Inverter power supply etc
- 用于工控的伺服系统中软启动和制动部分  
Applied to the soft starting and braking parts of industrial controlled servo drive system

### 主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)						
				L	L1	W	H	C	N	L2
RXLB-A	10	1R ~ 100R	±5% (J) ±10% (K)	32	22	22	9.5	27	3.0	可定制
	20	1R ~ 100R		40	30			35	3.0	
	35	1R ~ 100R		50	40			45	3.0	
	50	1R ~ 100R		60	50			55	3.0/4.0	

### 订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RXLB-A	20W	50R	±5%